

Rubber Wheel Stops

www.totaltactilez.co.nz

The Traffi-Tec® Rubber Wheelstops are used to prevent vehicles from travelling into other parking spaces or surrounding buildings. Creates a tidy and professional look to your carpark.

SPECIFICATIONS

Code:	49-RWS-BY
Description:	Traffi-Tec Rubber Wheel Stop
Material:	Recycled Rubber
Length:	1650mm
Height:	100mm
Weight:	16kg
Width:	150mm (at base)
Fixings:	3 per Wheel Stop




BENEFITS

- Recycled materials won't chip or corrode
- Complies with appropriate standard AS2890.1:2004
- Hi-vis chevrons create good visibility
- One man lift for cost effective and easy installation
- Flexible and will conform to most road surface

INSTALLATION

- **Concrete Surface**
M12 x 180mm Trubolt (Code: 49-FCT12)
- 3 required per Wheel Stop
- **Asphalt Surface**
M12 x 300mm Galv Spike (Code: 49-FR12)
- 3 required per Wheel Stop
- **Adhesive for Concrete or Asphalt**
For use where water proofing membrane is present and cannot be pierced. Bondurox C - 600gm tube. (Code: 49-BCA)
- 1 tube per 2 Wheel Stops

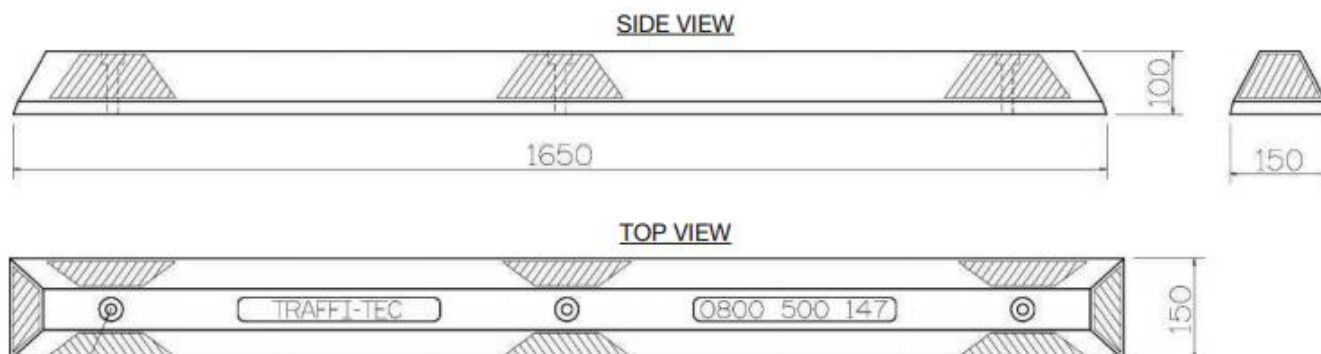

W www.totaltactilez.co.nz P 0800 TACTILE (822 845) F 0508 TACTILE (822 845) E info@totaltactilez.co.nz

LOCATIONS:

NZ HEAD OFFICE 6A Wither Road, Witherlea, Blenheim 7201

AUCKLAND DEPOT 62 Tidal Road, Mangere, Auckland 2022

CHRISTCHURCH DEPOT 101 Sturrocks Road, Casebrook, Christchurch 8051

